

Inset Mount

2.67"W X 1H X 1.32" D

### **Contour Drop-in & Inset Navigation Lights**

Contour's Drop-in series leverages a single, symmetrical universal pocket profile molded into the hardtop during manufacture. Mating draft angles and part radii have been carefully considered. Low profile, no exposed fasteners, and

a clean, modern monochromatic design. Sold as Port,

Starboard, or Stern.

**Drop-in Mount** 2.5"W X 1.17H X 1.5" D Requires Custom Mold



Output: Stren White, Port Red, Starboard Green

Visibility: USCG2NM 10-30vDC Voltage: 12vDC Amps: 18-26mA 24vDC Amps: 12-15mA Conforms to: ABYC A16





USCG compliant: 0-50 meter vessels.

Beam Angle

## **Contour Navigation/Docking Combination Light**


Innovation - plain and simple. Lumitec's engineers have combined a bright, sharp 1,000 lumen dock light with a U.S. Coast Guard approved 2nm navigation light. Easy to install, great looking, and all the reliability you've come to expect from Lumitec.

#### **LED Navigation Docking Light**

Output: Port Red, Starboard Green


Visibility: USCG2NM Flood Lumens: 1000 10-30vDC Voltage: 12vDC Amps: 1.3A (flood) 24vDC Amps: 600mA (flood) Conforms to: ABYC A16





USCG compliant: 0-50 meter vessels.



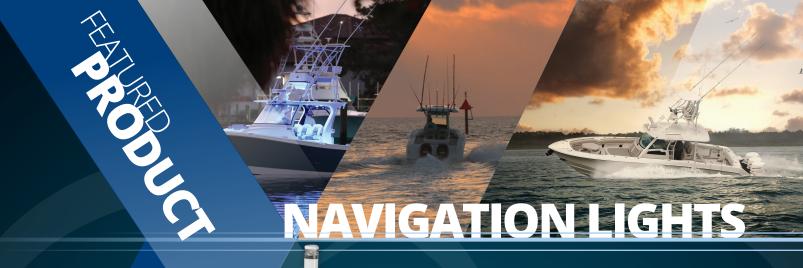

### **Contour Anchor Light**

The design says it all. Unobtrusive, durable, reliable, with striking good looks. The slimmest profile in the industry and a locking retractable base. Select from 12" or 1m heights. U.S. Coast Guard approved 2nm.

#### **LED Anchor Light**


Output: White USCG2NM Visibility: 10-30vDC Voltage: 12vDC Amps: 80mA 24vDC Amps: 45mA Conforms to: ABYC A16

2.5" Dia X 12" or 39" H

Available lengths: 12" (1 foot) 39" (1 meter)



Lockable base design



USCG compliant: 0-50 meter vessels.

# **Surface Mount Navigation Lights**

For retrofit and new applications where a molded-in pocket is not possible or practical, Lumitec offers our surface mount navigation lights. Clean styling and unmatched reliability. Choose classic aluminum half-round design for mounting to vertical surfaces, or the more contemporary composite version for horizontal mounting surfaces.



### **LED Surface Navigation Lights**

Output: Port Red, Starboard Green

USCG2NM Visibility: Voltage: 10-30vDC 12vDC Amps: 21-26mA 24vDC Amps: 13-15mA Cnforms to: ABYC A16

4.5"W X 1H X 2.1" D

3.6"W X 1H X 2.2" D

**Classic Aluminum Navigation Light** 

Beam Angle

USCG compliant: 0-50 meter vessels.

